


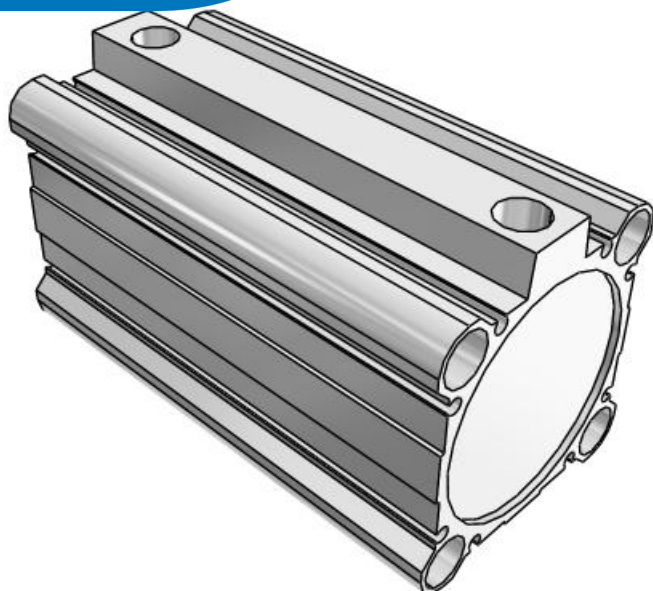


C(D)Q2, Compact Cylinder, Double Acting, Single Rod w/Auto Switch Mounting Groove

CDQ2B63TF-100DZ

Data Sheet

Following a review of our popular CQ2 compact cylinder Series our R&D engineers have totally redesigned the complete cylinder range to bring you even more performance benefits and increased cylinder options. The major difference between the new CQ2 range and the old model is the totally redesigned body, which offers improved auto-switch mounting possibilities plus an overall reduction of cylinder weight of between 5 -13% depending on the model. Now, all CQ2 cylinders from Ø 32 to 200mm are designed with slide in grooves which can accommodate auto-switches on all four cylinder sides without the need for auto-switch brackets. And, for smaller bore sizes between Ø 12 and 25mm, slide in grooves have also been integrated in the new body design to accommodate bracket free auto-switches on two surfaces. Designed for use with our simple to set, dual colour, solid state auto-switches, the integrated auto-switch channel ensures total protection against potential accidental damage and improved health and safety benefits during both installation and maintenance procedures.





Double-acting, single-rod cylinder


Standard Specifications

Aimant	Aimant intégré
Montage	Traversant [Standard]
Type	Standard
Alésage	63mm
Taraudage de l'orifice	G ø32-ø100
Réservoir de graisse	Sans lubrification constante
Course	100 mm
Option du corps	Tige taraudée
Rainure de fixation du détecteur	Rainure de fixation du détecteur
Détecteur	Sans détecteur
Câble ou connecteur précâblé	Câble 0.5 m ou aucun s'il n'y a pas de détecteur
Nombre	2 pcs. ou aucune s'il n'y a pas de détecteur
Pressure medium	Compressed air
Maximum temperature of pressure medium	70 °C
Maximum temperature of pressure medium with magnet	60 °C
Minimum temperature of pressure medium	-10 °C [without condensation]
Minimum temperature of pressure medium with magnet	-10 °C [without condensation]
Maximal operating pressure	1.0 MPa
Minimum operating pressure	0,05 Mpa
Proof pressure	1.5 MPa
Maximum ambient temperature	70 °C
Maximum ambient temperature with magnet	60 °C
Minimum ambient temperature	-10 °C [without condensation]
Minimum ambient temperature with magnet	-10 °C [without condensation]
Conform to the European RoHS Directive	Not conform
Number of pneumatic connections	2 pcs.
Pneumatic input connection	G 1/4
Mode of operation of drive	Double acting
Theoretical cylinder force, advance stroke (at 0.5 MPa)	1400 N
Theoretical cylinder force, return stroke (at 0.5 MPa)	1560 N
Maximum piston speed	500 mm/s
Geometric form of the piston rod	Single rod
Malethread of rod end	M18 x 1.5
Femalethread of rod end	M10 x 1.5
Minimum piston speed	50 mm/s
Weight	1.326 kg

Dimensions

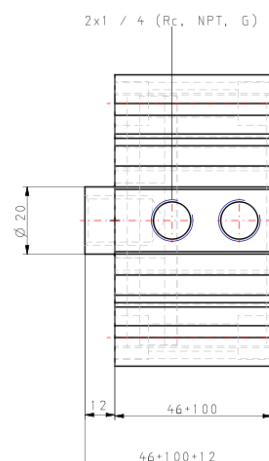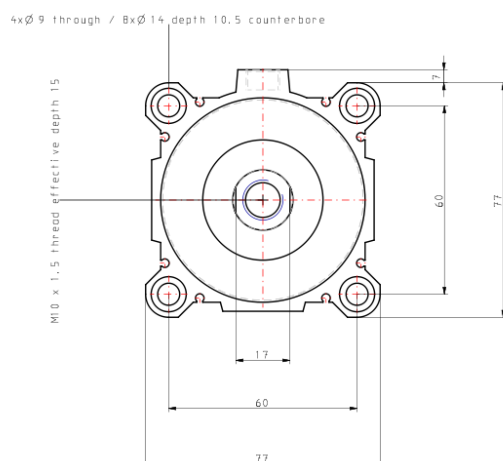

Constructions

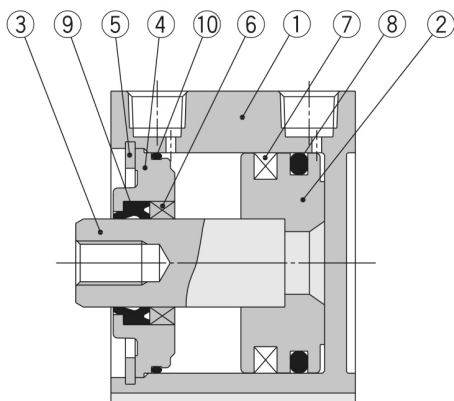

Component Parts

No.	Description	Material	Note
1	Cylinder tube	Aluminum alloy	Hard anodised
2	Piston	Aluminum alloy	Chromated
3	Piston rod	Stainless steel	ø12 to ø25
		Carbon steel	ø32 to ø100, Hard chrome plated
4	Collar	Aluminum alloy	ø12 to ø40, Anodised
		Aluminum alloy casted	ø50 to ø100, Chromated, Painted
5	Retaining ring	Carbon tool steel	Phosphate coated
6	Bushing	Bearing alloy	For ø50 or more only
7	Magnet	—	
8	Piston seal	NBR	
9	Rod seal	NBR	
10	Gasket	NBR	

Additional information

Catalogue

[CQ2-Z-B_EU.pdf](#)

Related Products



[D-M9BWL](#)

M9NW/M9PW/M9BW, 2 Colour Indication Style Solid State Switch, Direct Mounting, Grommet, In-line



[D-M9PWL](#)

M9NW/M9PW/M9BW, 2 Colour Indication Style Solid State Switch, Direct Mounting, Grommet, In-line



[D-M9NWL](#)

M9NW/M9PW/M9BW, 2 Colour Indication Style Solid State Switch, Direct Mounting, Grommet, In-line



[AS2201F-02-08SA](#)

AS*2/3*1F-A, Speed Controller with One-touch Fitting, Push Lock, Elbow/Universal Type



[AS2301F-02-08SA](#)

AS*2/3*1F-A, Speed Controller with One-touch Fitting, Push Lock, Elbow/Universal Type



[AS2201FS-G02-08](#)

AS*2/3*1FS, Speed Controller with Indicator, Elbow & Universal Types



[AS2301FS-G02-08](#)

AS*2/3*1FS, Speed Controller with Indicator, Elbow & Universal Types



[AS2052FS-08](#)

AS*2FS, Speed Controller with Indicator, In-line Type



[KQ2H08-G02A](#)

KQ2H, One-touch Fitting White Color - Male Connector



[TU1065B-20](#)

TU, Polyurethane Tubing, Metric Size



[SY](#)

SY3000/5000/7000, Subplate for Single Unit New SY, IP67 Compliant