


series ISO 1



Brochure



Solenoid valves


★ 5/2-way valve, single solenoid, series ISO 1

Qn = 1060 l/min, ISO base plate connection, size 1, mono-stable or double air pilot, for electrical connector, as per ISO 4400 (form A), pilot valve with CNOMO porting configuration, axial version

		Operating voltage	Working pressure min/max [bar]	Qn [l/min]	Weight [kg]		Part No.
		24 V AC	2,2 - 10	1060	0,37	-	0820024127
		24 V DC				-	0820024126
		24 V DC				2)	0820024135
		110 V AC				-	0820024128
		230 V AC				-	0820024125
		-				1)	0820024997
		24 V AC	1 - 10	1060	0,52	-	0820024603
		24 V DC				-	0820024602
		24 V DC				2)	0820024610
		110 V AC				-	0820024604
		230 V AC				-	0820024601
		-				1)	0820024998

1) basic valve without coil

2) Low power consumption

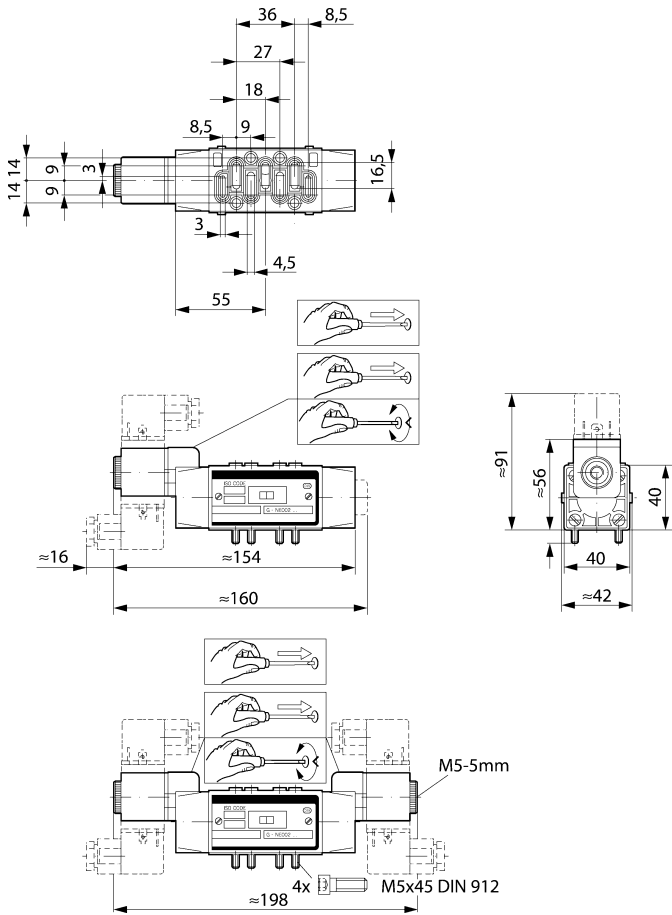

00107400