


06 Femelle tournant JIC 37°



ISO12151-5-SWS – DKJ



XXXXX-XX-XX Référence 78	D. Int. du tuyau				Filetage UNF	A mm	B mm	H mm	W mm
	DN	pouce	module	mm					
10678-12-12-SM	20	3/4	-12	19,1	1-1/16x12	93	45	30	32
10678-16-16-SM	25	1	-16	25,4	1-5/16x12	103	52	36	41
10678-16-20-SM	32	1-1/4	-20	31,8	1-5/16x12	116	52	46	41
10678-20-20-SM	32	1-1/4	-20	31,8	1-5/8x12	125	61	46	55
10678-24-24-SM	40	1-1/2	-24	38,1	1-7/8x12	128	66	50	60

37 Femelle tournant JIC 37° coude 45°

ISO 12151-5-SWE 45° – DKJ 45°

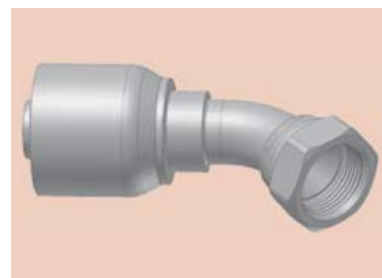

XXXXX-XX-XX Référence 78	D. Int. du tuyau				Filetage UNF	A mm	B mm	E mm	W mm
	DN	pouce	module	mm					
13778-12-12-SM	20	3/4	-12	19,1	1-1/16x12	104	56	22	32
13778-16-16-SM	25	1	-16	25,4	1-5/16x12	119	69	24	41
13778-20-20-SM	32	1-1/4	-20	31,8	1-5/8x12	172	108	47	55
13778-24-24-SM	40	1-1/2	-24	38,1	1-7/8x12	194	132	58	60

Série d'embouts compatible avec les tuyaux:

SM: 6 pans métrique

78 781 782TC