

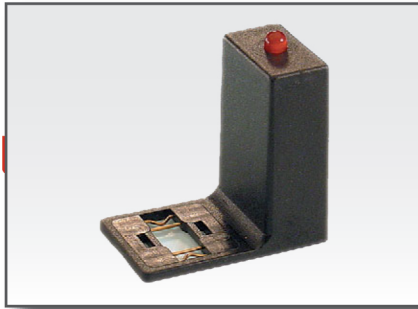


FILTRI ANTIDISTURBO/SURGE SUPPRESSORS/ENTSTÖRGLIEDER

C

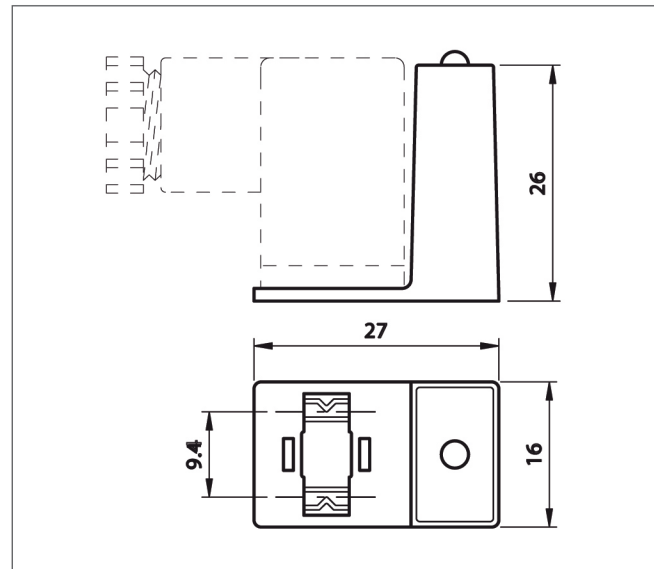

INDUSTRIAL STANDARD

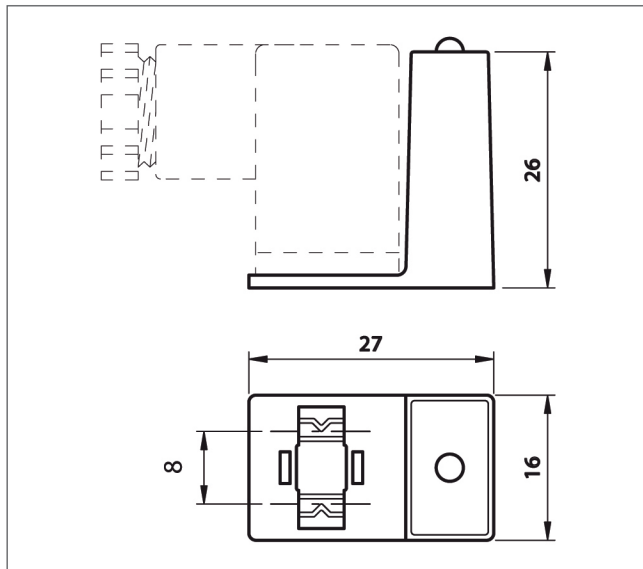

Corpo Case Gehäuse	PA66 +30% FV
Interasse Spacing Abstand	8 mm
Temperatura di funzionamento Working temperature Betriebstemperatur	- 25°C / + 90°C

Corpo connettore Connector Stecker	PA66 +30% FV
Interasse Spacing Abstand	9,4 mm
Temperatura di funzionamento Working temperature Betriebstemperatur	- 25°C / + 90°C

Codici ordine - Codification - Bestellschlüssel

E C 6

Codici ordine - Codification - Bestellschlüssel

E C

Colore LED: vedi pag. 7.1
LED colour: see page 7.1
LED- Farbe: siehe Seite 7.1

Circuiti: vedi pag. 7.1
Circuitry: see page 7.1
Beschriftung: siehe Seite 7.1