

FILTRI ANTIDISTURBO/SURGE SUPPRESSORS/ENTSTÖRGLIEDER



B H12



B H6



B

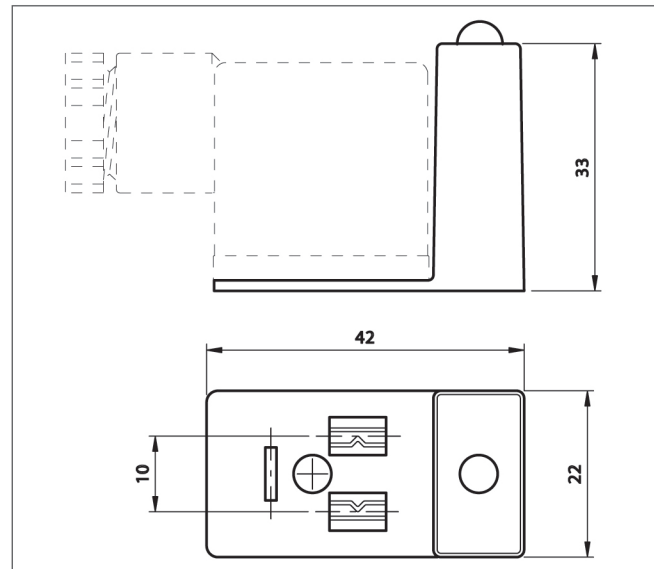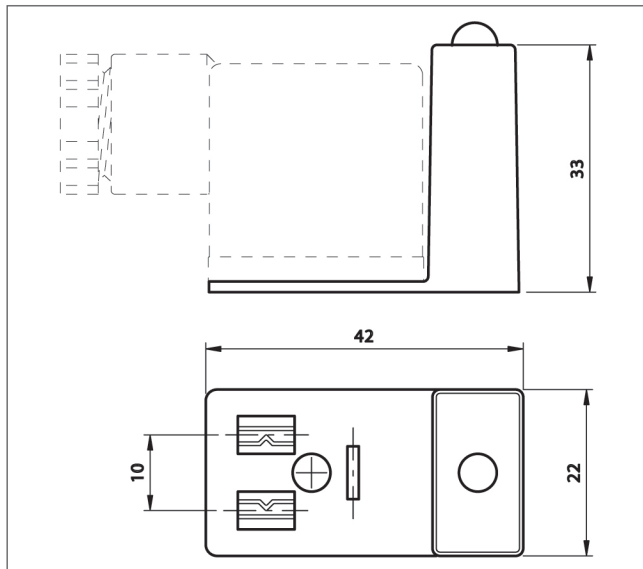

Corpo
Case
Gehäuse PA66 +30% FV

Interasse
Spacing
Abstand 10 mm

Temperatura di funzionamento
Working temperature
Betriebstemperatur - 25°C / + 90°C

Corpo connettore
Connector
Stecker PA66 +30% FV

Interasse
Spacing
Abstand 10 mm

Temperatura di funzionamento
Working temperature
Betriebstemperatur - 25°C / + 90°C

Codici ordine - Codification - Bestellschlüssel

E B 5 0

Codici ordine - Codification - Bestellschlüssel

E B 5 6

Colore LED: vedi pag. 7.1
LED colour: see page 7.1
LED- Farbe: siehe Seite 7.1

Circuiti: vedi pag. 7.1
Circuitry: see page 7.1
Besaltung: siehe Seite 7.1