


739 LMR MALE ADAPTER TUBE TO PIPE

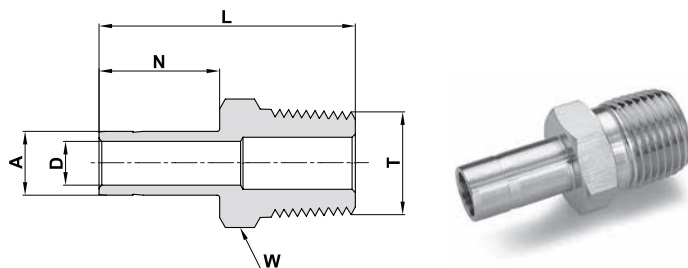

TUBE (METRIC) MALE PIPE

Ordering Information	A Tube O.D.	T (ISO)	D	W Hex. Flat	N	L
	mm	inch	mm	mm	mm	mm
739LMR _ 6 X 1/8	6	R-1/8	4.0	12	15.7	32.8
739LMR _ 6 X 1/4	6	R-1/4	4.0	14	15.7	38.1
739LMR _ 6 X 1/2	6	R-1/2	4.0	22	15.7	43.4
739LMR _ 8 X 1/8	8	R-1/8	4.8	12	16.8	33.5
739LMR _ 8 X 1/4	8	R-1/4	5.6	14	16.8	39.1
739LMR _ 8 X 3/8	8	R-3/8	5.6	11/16 inch	16.8	37.8
739LMR _ 10 X 1/4	10	R-1/4	7.1	14	17.5	39.9
739LMR _ 10 X 3/8	10	R-3/8	7.1	18	17.5	40.6
739LMR _ 10 X 1/2	10	R-1/2	7.1	22	17.5	46.2
739LMR _ 12 X 1/4	12	R-1/4	7.1	16	23.1	46.5
739LMR _ 12 X 3/8	12	R-3/8	8.8	18	23.1	46.2
739LMR _ 12 X 1/2	12	R-1/2	8.8	22	23.1	52.0
739LMR _ 20 X 3/4	20	R-3/4	15.1	27	26.6	54.3

TUBE (INCH) MALE PIPE


Ordering Information	A Tube O.D.		T (ISO)	D		W Hex. Flat	N		L	
	inch	mm	inch	inch	mm	inch	inch	mm	inch	mm
739LMR _ 1/8 X 1/8	1/8	3.17	R-1/8	.08	2.0	7/16	.53	13.45	1.16	29.5
739LMR _ 1/8 X 1/4	1/8	3.17	R-1/4	.08	2.0	9/16	.53	13.45	1.37	34.8
739LMR _ 1/4 X 1/8	1/4	6.35	R-1/8	.17	4.2	7/16	.62	15.75	1.25	31.8
739LMR _ 1/4 X 1/4	1/4	6.35	R-1/4	.17	4.2	9/16	.62	15.75	1.46	37.1
739LMR _ 1/4 X 3/8	1/4	6.35	R-3/8	.17	4.2	11/16	.62	15.75	1.49	37.9
739LMR _ 1/4 X 1/2	1/4	6.35	R-1/2	.17	4.2	7/8	.62	15.75	1.71	43.4
739LMR _ 3/8 X 1/4	3/8	9.52	R-1/4	.27	6.9	9/16	.69	17.50	1.53	38.9
739LMR _ 3/8 X 3/8	3/8	9.52	R-3/8	.27	6.9	11/16	.69	17.50	1.56	39.6
739LMR _ 3/8 X 1/2	3/8	9.52	R-1/2	.27	6.9	7/8	.69	17.50	1.78	45.2
739LMR _ 1/2 X 1/4	1/2	12.70	R-1/4	.28	7.1	9/16	.91	23.10	1.75	44.5
739LMR _ 1/2 X 3/8	1/2	12.70	R-3/8	.37	9.4	11/16	.91	23.10	1.78	45.2
739LMR _ 1/2 X 1/2	1/2	12.70	R-1/2	.37	9.4	7/8	.91	23.10	2.00	50.8
739LMR _ 5/8 X 1/2	5/8	15.87	R-1/2	.47	11.9	7/8	.97	24.65	2.06	52.3
739LMR _ 3/4 X 1/2	3/4	19.05	R-1/2	.47	11.9	7/8	.97	24.65	2.06	52.3
739LMR _ 3/4 X 3/4	3/4	19.05	R-3/4	.59	15.0	1 1/16	.97	24.65	2.06	52.3
739LMR _ 1 X 1	1	25.40	R-1	.80	20.3	1 3/8	1.30	33.00	2.60	66.0

Reference Specifications:

DIN -ISO 2999
BS - 21JIS - B0203ISO - 7/1-BSP-T

Designation:
Marking LR on Hex

55° Thread angle
Truncation of root and crest is round
Taper angle 1°47'



"D" - Dimension is minimum opening. Dimensions are for reference only, and are subject to change without notice.