

## Valve systems → Valve systems

**Series HF03-LG**  
 Accessories

**Blanking plate, Series HF03-LG, CL03**


1690

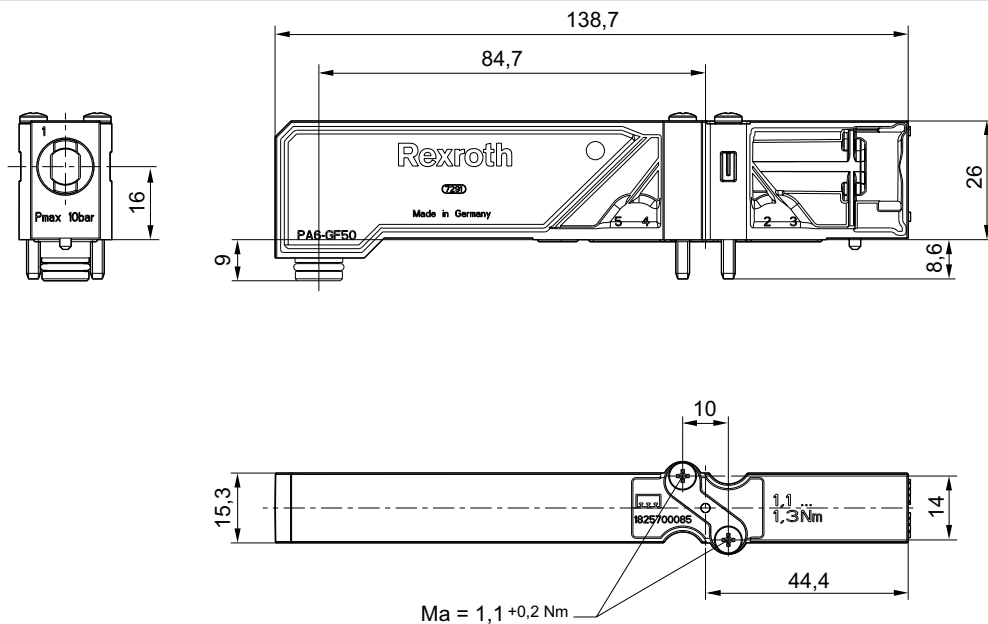
Ambient temperature min./max.	-5 °C / +50 °C
Medium	Compressed air
Working pressure min./max.	-0.9 bar / 10 bar
Mounting screw	cross recessed DIN EN ISO 4757-Z1
Tightening torque for mounting screws	1.1 Nm+0,2

Materials:	
Subbase	Polyamide
Seals	Nitrile rubber

**Technical Remarks**

- The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C.
- The oil content of compressed air must remain constant during the life cycle.
- Use only the approved oils from Bosch Rexroth, see chapter „Technical information“.

Type	Delivery quantity	Weight [kg]	Part No.
Blanking plate, incl. sealing kit, 2x mounting screws	1	0.093	<b>1825A00085</b>

**Dimensions**


21308