

Reservoir, Series AS2-CLS/ -CLP/ -CLC

- for filters, pre-filters and microfilters
- Material Polycarbonate Die cast zinc
- suitable for ATEX



Type	Reservoir
Certificates	suitable for ATEX
Working pressure min./max.	16 bar
Ambient temperature min./max.	-10 ... 50 °C
Medium temperature min./max.	-10 ... 50 °C
Medium	Compressed air
Filter reservoir volume	28 cm ³
Weight	See table below

Technical data

Part No.	Condensate drain	Reservoir
R412006338	semi-automatic, open without pressure	Polycarbonate
R412006339	fully automatic, open without pressure	Polycarbonate
R412006340	fully automatic, closed without pressure	Polycarbonate
R412006344	semi-automatic, open without pressure	Die cast zinc, with window
R412006345	fully automatic, open without pressure	Die cast zinc, with window
R412006346	fully automatic, closed without pressure	Die cast zinc, with window

Part No.	Protective guard	Weight	Fig.
R412006338	Polyamide	0,077 kg	Fig. 1
R412006339	Polyamide	0,12 kg	Fig. 2
R412006340	Polyamide	0,12 kg	Fig. 2
R412006344	-	0,338 kg	Fig. 1
R412006345	-	0,39 kg	Fig. 2
R412006346	-	0,39 kg	Fig. 2


Suitable for use in Ex zones 1, 2, 21, 22.

Technical information

Material	
Reservoir	Polycarbonate Die cast zinc
Protective guard	Polyamide
Seal	Acrylonitrile butadiene rubber


Dimensions

Dimensions in mm, Fig. 1

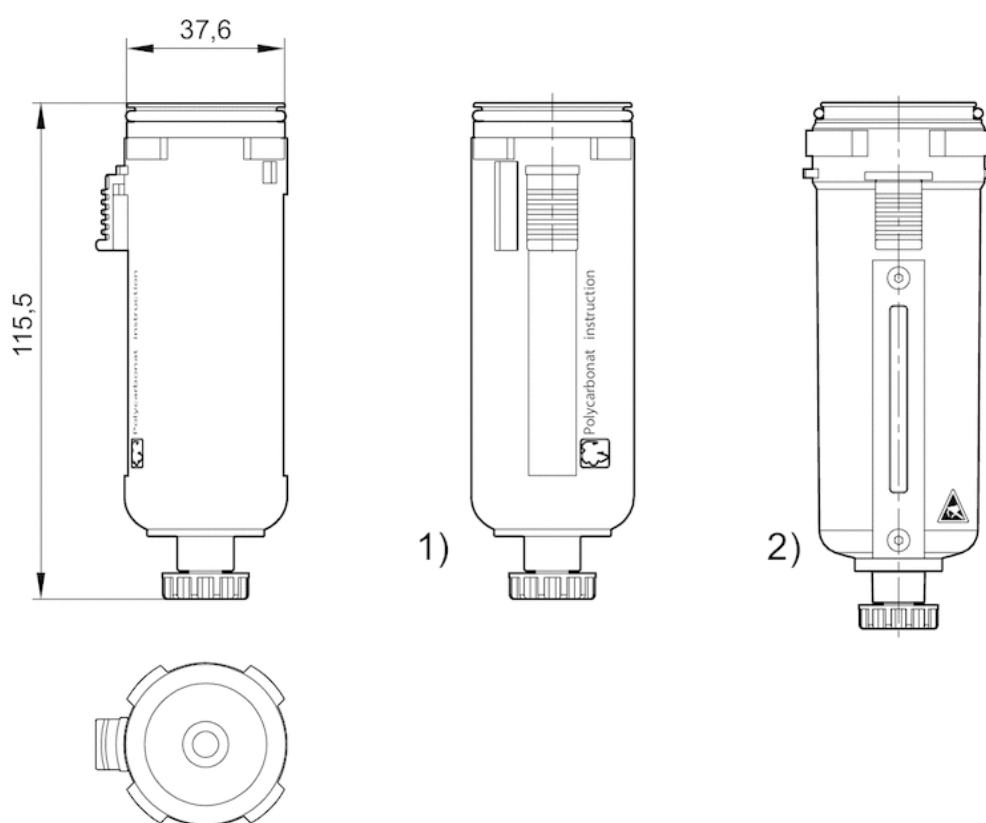

- 1) Plastic reservoir and protective guard with window
- 2) Metal reservoir with inspection glass

Dimensions in mm, Fig. 2

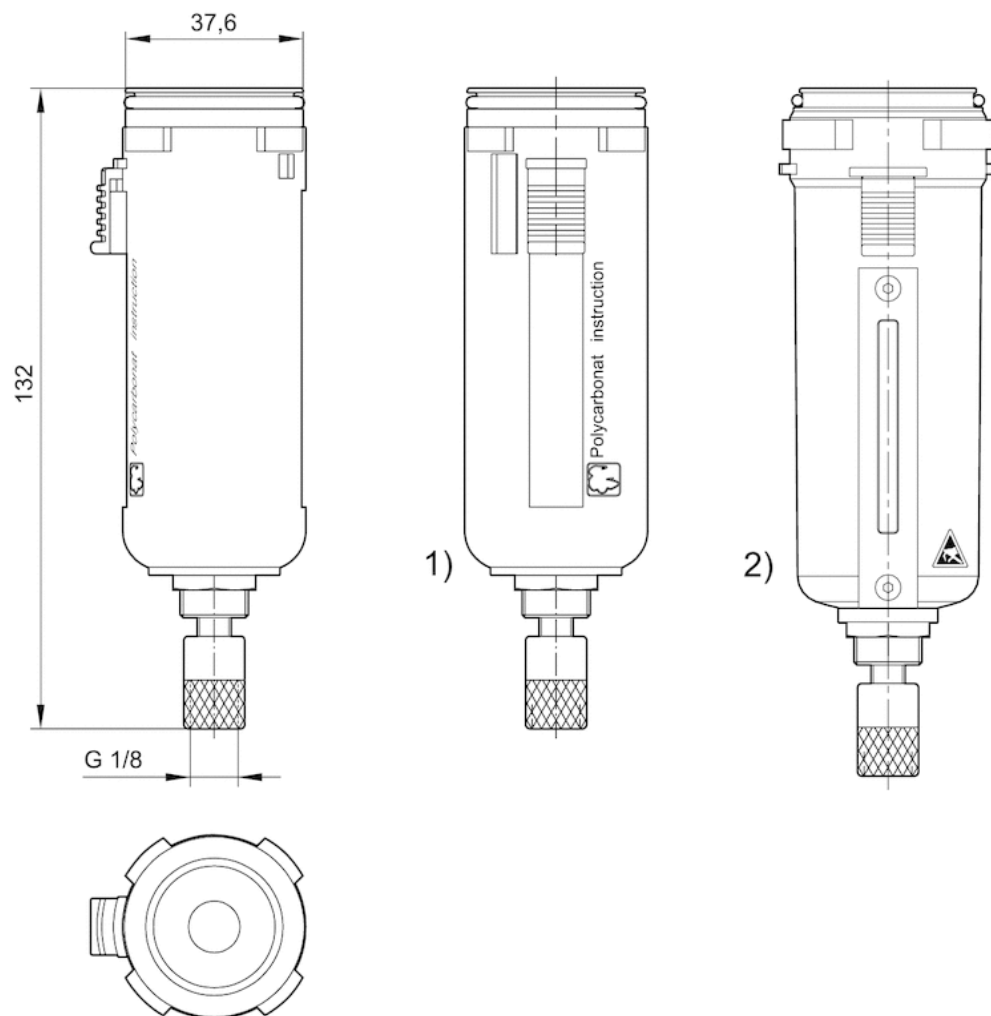

- 1) Plastic reservoir and protective guard with window
- 2) Metal reservoir with inspection glass