


V4OMLO Coude mâle à 45° – BSPP

O-Lok® mâle ORFS / filetage BSPP orientable avec joint torique et bague de retenue (ISO 1179)

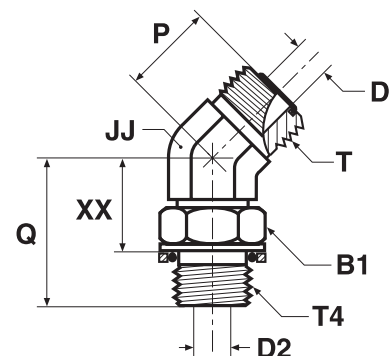

Ø ext. du tube	Filetage BSPP	Filetage UN/UNF-2A	B1	D	D2	JJ	P	Q	XX	Poids (Acier) gr./pièce	O-Lok® Acier	O-Lok® Acier inox	PN (bar) S SS
mm	in.	T4	T	mm	mm	mm	mm	mm	mm				
6	1/4	1/8-28	9/16-18	14	5	4	14	16	28	38	4V4OMLOS	4V4OMLOSS	250 250
6	1/4	1/4-19	9/16-18	19	5	8	19	17	33	43	4-4V4OMLOS	4-4V4OMLOSS	250 200
8, 10	5/16, 3/8	1/4-19	11/16-16	19	7	8	19	19	32	83	6V4OMLOS	6V4OMLOSS	250 200
8, 10	5/16, 3/8	3/8-19	11/16-16	22	7	10	19	19	34	95	6-6V4OMLOS	6-6V4OMLOSS	250 200
8, 10	5/16, 3/8	1/2-14	11/16-16	27	7	12	27	19	43	107	6-8V4OMLOS	6-8V4OMLOSS	250 200
12	1/2	3/8-19	13/16-16	22	10	10	19	20	34	117	8V4OMLOS	8V4OMLOSS	250 200
14, 15, 16	5/8	1/2-14	1-14	27	13	12	27	23	43	191	10V4OMLOS	10V4OMLOSS	250 200
14, 15, 16	5/8	3/4-14	1-14	36	13	16	30	24	46	227	10-12V4OMLOS	10-12V4OMLOSS	250 200
18, 20	3/4	3/4-14	1 3/16-12	36	16	16	30	26	46	294	12V4OMLOS	12V4OMLOSS	250 200
18, 20	3/4	1-11	1 3/16-12	41	16	22	36	30	51	325	12-16V4OMLOS	12-16V4OMLOSS	250 200
22, 25	1	1-11	1 7/16-12	41	21	22	36	30	51	394	16V4OMLOS	16V4OMLOSS	250 200
28, 30, 32	1 1/4	1 1/4-11	1 11/16-12	50	26	28	41	32	52	430	20V4OMLOS	20V4OMLOSS	210 160
35, 38	1 1/2	1 1/2-11	2-12	55	32	33	50	37	52	551	24V4OMLOS	24V4OMLOSS	140 140

Fourni avec joint TRAPSEAL en NBR. Pour remplacement du joint TRAPSEAL par un joint torique NBR, voir page J73.