


Femelles tête hexagonale 316L usinés

DIN 2986

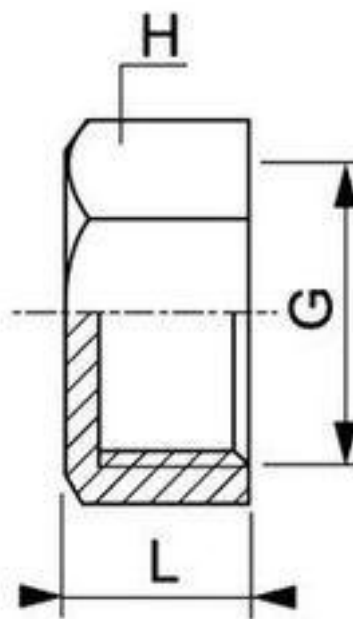

DN	G	L (Gaz/NPT)	H	Poids (Kg)	Raccordement	Réf.	Raccordement	Réf.
5	1/8"	10	13	0,005	Gaz/BSP	BF5G		
8	1/4"	10-12	17	0,01	Gaz/BSP	BF8G	NPT/BRIGGS	BF8B
12	3/8"	12-16	21	0,02	Gaz/BSP	BF12G	NPT/BRIGGS	BF12B
15	1/2"	14-18	24	0,025	Gaz/BSP	BF15G	NPT/BRIGGS	BF15B
20	3/4"	16-18	30	0,05	Gaz/BSP	BF20G	NPT/BRIGGS	BF20B
25	1"	17-22	38	0,075	Gaz/BSP	BF25G	NPT/BRIGGS	BF25B
32	1"1/4	19-22	46	0,11	Gaz/BSP	BF32G	NPT/BRIGGS	BF32B
40	1"1/2	23-26	55	0,22	Gaz/BSP	BF40G	NPT/BRIGGS	BF40B
50	2"	25-26	65	0,26	Gaz/BSP	BF50G	NPT/BRIGGS	BF50B
65	2"1/2	29	84	0,52	Gaz/BSP	BF65G	NPT/BRIGGS	BF65B
80	3"	34	95	0,67	Gaz/BSP	BF80G	NPT/BRIGGS	BF80B
100	4"	40	124	1,27	Gaz/BSP	BF100G	NPT/BRIGGS	BF100B

Les cotes d'encombrement sont susceptibles de varier. En cas de cotes impératives, merci de nous consulter.