

Reservoir, Series NL1/AS1-CBM/-CLA

- for active carbon filter and lubricator
- Material Polycarbonate Die cast zinc



Type	Reservoir
Certificates	suitable for ATEX
Working pressure min./max.	16 bar
Ambient temperature min./max.	-10 ... 50 °C
Medium temperature min./max.	-10 ... 50 °C
Medium	Compressed air Oil
Filter reservoir volume	16 cm³
Weight	See table below

Technical data

Part No.	Reservoir	Weight	Fig.
1827009637	Polycarbonate	0,06 kg	Fig. 1
1827009638	Die cast zinc	0,125 kg	Fig. 2


Suitable for use in Ex zones 1, 2, 21, 22.

Technical information


Material		
Reservoir	Polycarbonate Die cast zinc	
Seal	Acrylonitrile butadiene rubber	

Dimensions

Dimensions in mm, Fig. 1

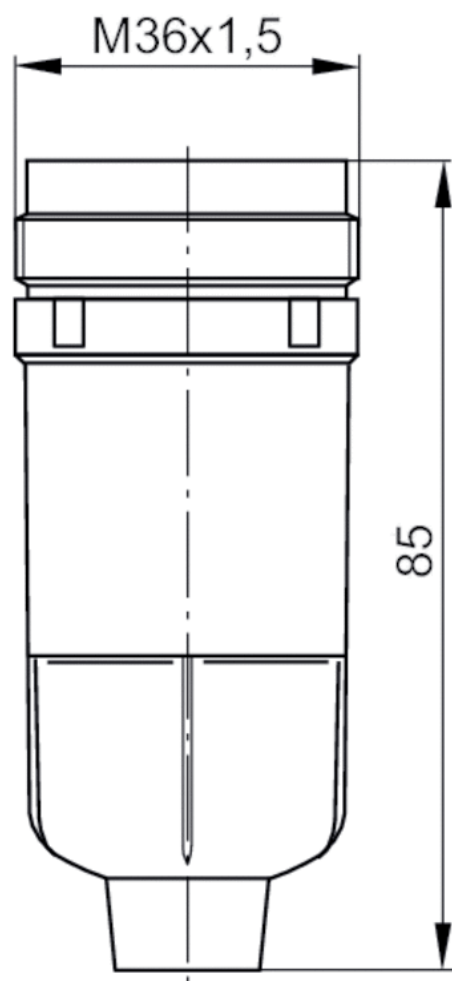

Dimensions in mm, Fig. 2

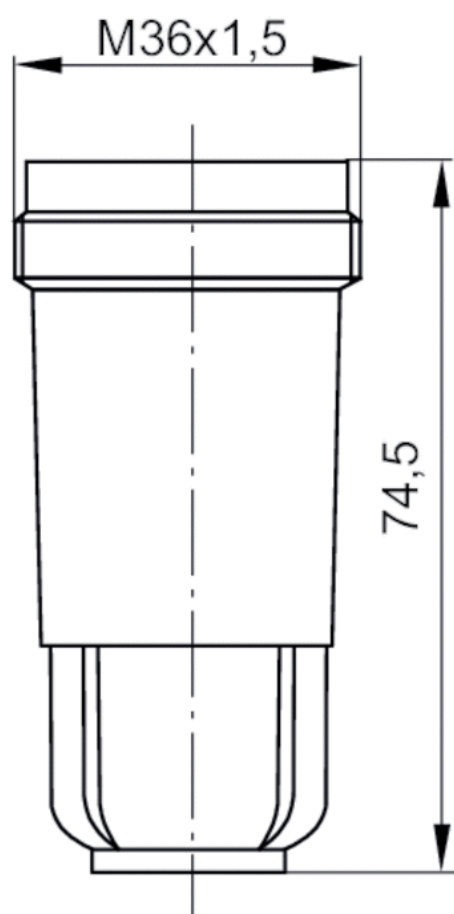

Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: [Emerson.com/Aventics](https://emerson.com/aventics)

Your local contact: [Emerson.com/contactus](https://emerson.com/contactus)



Emerson.com



Facebook.com/EmersonAutomationSolutions



LinkedIn.com/company/Emerson-Automation-Solutions



Twitter.com/EMR_Automation

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2020 Emerson Electric Co. All rights reserved.
2020-12



CONSIDER IT SOLVED™