


92 Femelle tournant BSP



BS5200-A – DKR



Référence	D. Int. du tuyau				Filetage BSP	A mm	B mm	W mm
	DN	pouce	module	mm				
19273-12-12	19	3/4	-12	19.1	3/4x14	75	27	32
19273-16-16	25	1	-16	25.4	1x11	89	38	41
19273-20-20	31	1 1/4	-20	31.8	1 1/4x11	101	37	50
19273-24-20	31	1 1/4	-20	31.8	1 1/2x11	101	37	55
19273-24-24	38	1 1/2	-24	38.1	1 1/2x11	100	37	55
19273-32-32	51	2	-32	50.8	2x11	113	38	70

B1 Femelle tournant BSP coude 45°

BS 5200-D – DKR 45°

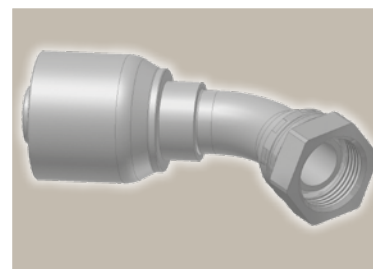

Référence	D. Int. du tuyau				Filetage BSP	A mm	B mm	E mm	W mm
	DN	pouce	module	mm					
1B173-12-12	19	3/4	-12	19.1	3/4x14	110	62	26	32
1B173-16-16	25	1	-16	25.4	1x11	136	84	36	41
1B173-20-20	31	1 1/4	-20	31.8	1 1/4x11	168	104	43	50
1B173-24-24	38	1 1/2	-24	38.1	1 1/2x11	186	123	52	55
1B173-32-32	51	2	-32	50.8	2x11	249	177	70	70

Série d'embouts compatible avec les tuyaux:

73 731 731TC SX35 SX42