




Code	A BSP	Dimensions en mm				Vis CHC Classe 8.8	O-Ring 70 Shore	Pression de Service (bar)	Masse Kg
		B	C	D	E				
B1-099	3/8"	30	19	11	40	M6x20-M6x35	121	315	0,320
B1-100	1/2"	30	19	11	40	M6x20-M6x35	121	315	0,280
B1-101	3/8"	35	18	11,5	40	M6x20-M6x35	3075	315	0,290
B1-102	1/2"	35	18	11,5	40	M6x20-M6x35	3075	315	0,265
B1-107	3/8"	40	24	13	42,5	M6x25-M6x45	132	315	0,385
B1-103	1/2"	40	24	13	42,5	M6x25-M6x45	132	250	0,360
B1-104	3/4"	40	24	13	42,5	M6x25-M6x45	132	250	0,335
B1-108	1/2"	55	34	13	54	M8x25-M8x60	4118	250	0,750
B1-105	3/4"	55	34	13	54	M8x25-M8x60	4118	250	0,720
B1-106	1"	55	34	13	54	M8x25-M8x60	4118	250	0,710

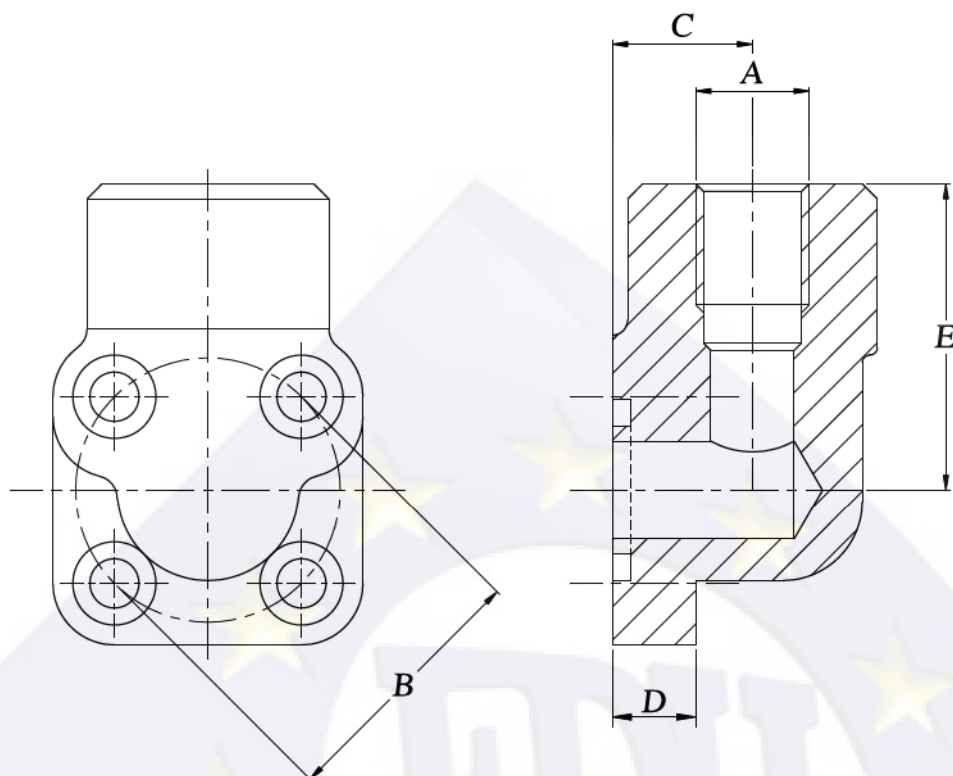

BRIDE ACIER COUDEE

Matière : Acier - Zingué blanc

Livré avec vis, rondelles et joint O-Ring

Pression de service : Voir tableau